


SL-2 Digital Heat Sealer

Lako Tool is proud to introduce the **SL-2 Digital Heat Sealer**. The **SL-2 Digital Heat Seal Tester** is a precision heat sealer designed to duplicate heated crimp seals for the flexible packaging industry.

The digitally controlled heat sealer allows independent upper and lower seal jaw temperature. The controlled temperature is assured to $\pm 1.1^{\circ}\text{C}$ ($\pm 2^{\circ}\text{F}$) across the entire width of the film sample. The dwell timer is switch controlled to insure actual dwell time on the seal specimen.

The **SL-2 Digital Heat Sealer** insures sealing consistency for each sample and allows the operator to duplicate and analyze sealing applications in flexible packaging.

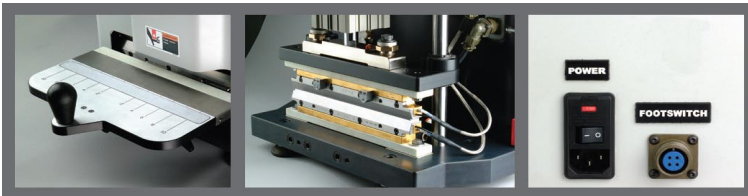

▲ Manual Loading Tray

▲ Quick Change Seal Jaws

▲ Footswitch & Power Module

SL-2 Digital Heat Sealer Optional Features

- Additional quick-change seal jaw inserts with any seal pattern 5 to 12 in long (12.7 to 30.4 cm)
- Manual sample loading tray accepts film 2 to 12 in wide (5 to 30.4 cm)
- Phenolic seal jaw tray
- On site training

SL-2 Digital Heat Sealer Standard Features

- Digitally controlled temperature and dwell time
- Independent upper and lower sealing temperatures
- Measures actual dwell time on the sealing sample
- One pair of Quick-Change Seal Jaw Inserts 5 to 12in long (12.7 to 30.4 cm) with desired seal pattern (*The quick- change seal jaw inserts allow the operator to change the sealing pattern in a matter of minutes without having to change heaters or wiring*)
- Footswitch
- Safety guards and switches for safe operation
- Case with hardware
- Conforms to ASTM F2029 Standard Practices for Making Heatseals for Determination of Heatsealability of Flexible Webs as Measured by Seal Strength

SL-2 Digital Heat Sealer

Performance Data

Sealing Temperature

Range	Ambient - 400°C (752 °F)
Resolution	± 0.1°C (1.8 °F)
Measuring Accuracy	± 0.70°C (1.26 °F)
Control Band	± .2 °C (0.36 °F)

Sealing Pressure

Range	68.9 kpa - 4830 kPa (10 psi -700 psi)
Resolution	1.38 kPa (.2 psi)

Sealing Dwell Time

Range	0.20 - 99.99 s
Resolution	10 ms
Control Accuracy	± 0.025 ms
Repeatability	± 50ms

Sealing Jaw Options

Length	12 in (30.4 cm) Maximum
Width	0.197 -1.00 in (5 - 25.4 mm)
Seal Surface	Flat, Vertical, Horizontal, Custom or Standard Geometry

*All jaws designed for quick & easy changeover

Machine Requirements

Power	110V to 240V 50/60 Hz, 1000 VA
Air (clean, dry)	90psi - 120psi (90psi is recommended)

Physical Specifications

W x D x H	23 in x 15-3/4 in x 24-3/8 in (58.4 cm x 40 cm x 63 cm)
Weight	135 lbs.(61.2 kg)



For more information on **Lako's SL-2 Digital Heat Sealer**, or any of our products, contact **Testing Machines Inc.** at 302-613-5600 or email: info@testingmachines.com

Main Headquarters

Testing Machines Inc.
40 McCullough Drive
New Castle, DE 19720
Tel: (302) 613-5600
Fax: (302) 613-5619
Info@testingmachines.com

Büchel BV
t/a Messmer Büchel
Fokkerstraat 24, 3905 KV
Veenendaal, Netherlands
Tel: +31 (0)318 521500
Fax: +31 (0)318 540358

Lako Tool and Manufacturing Inc.
7400 Ponderosa Road
Perrysburg, Ohio 43552
Tel: (419) 662-5256
Fax: (419) 662-8225

Lawson Hemphill
1658 G A R Highway
Swansea, MA 02777
Tel: (508) 679-5364
Fax: (508) 679-5396
Information@
lawsonhemphill.com

Adamel Lhomargy SARL
Z.A. de l'Habitat, Bâtiment 6
Route d'Ozoir, 77680
Roissy en Brie, France
Tel: +33 (0) 1 64402910
Fax: +33 (0) 1 64409211

TMI Canada
40 McCullough Drive
New Castle, DE 19720
Tel: (302) 613-5600
Fax: (302) 613-5619
canada@testingmachines.com

